





| Model specification       | Item No. | Emitted Color | Test voltage (V) | Current (mA) $\pm 10\%$ | Power (W) $\pm 10\%$ | Luminous flux(LM) $\pm 25\%$ | Color temperature (K) | X,Y Coordinate/<br>Dominant wavelength | Light efficiency (LM/W) |
|---------------------------|----------|---------------|------------------|-------------------------|----------------------|------------------------------|-----------------------|----------------------------------------|-------------------------|
| 1142-T17-1UHP-W-10-30VAC  | /        | White         | 12               | 100                     | 1.20                 | 100                          | 5500                  | X:0.33-0.34 Y:0.34-0.35                | 83.3                    |
|                           |          |               | 24               | 60                      | 1.44                 | 110                          | 5500                  | X:0.33-0.34 Y:0.34-0.35                | 76.4                    |
| 1142-T17-1UHP-WW-10-30VAC | /        | Warm White    | 12               | 100                     | 1.20                 | 100                          | 3000                  | X:0.43-0.44 Y:0.40-0.41                | 83.3                    |
|                           |          |               | 24               | 60                      | 1.44                 | 110                          | 3000                  | X:0.43-0.44 Y:0.40-0.41                | 76.4                    |
| 1142-T17-1UHP-B-10-30VAC  | /        | Blue          | 12               | 100                     | 1.20                 | 16                           | /                     | $\lambda$ D:455-460                    | 13.3                    |
|                           |          |               | 24               | 60                      | 1.44                 | 18                           | /                     | $\lambda$ D:455-460                    | 12.5                    |
| 1142-T17-1UHP-G-10-30VAC  | /        | Green         | 12               | 100                     | 1.20                 | 55                           | /                     | $\lambda$ D:525-530                    | 45.8                    |
|                           |          |               | 24               | 60                      | 1.44                 | 60                           | /                     | $\lambda$ D:525-530                    | 41.7                    |
| 1142-T17-1UHP-R-10-30VAC  | /        | Red           | 12               | 80                      | 1.20                 | 30                           | /                     | $\lambda$ D:625-630                    | 25.0                    |
|                           |          |               | 24               | 45                      | 1.44                 | 32                           | /                     | $\lambda$ D:625-630                    | 22.2                    |
| 1142-T17-1UHP-A-10-30VAC  | /        | Amber         | 12               | 80                      | 1.20                 | 20                           | /                     | $\lambda$ D:590-595                    | 16.7                    |
|                           |          |               | 24               | 45                      | 1.44                 | 22                           | /                     | $\lambda$ D:590-595                    | 15.3                    |

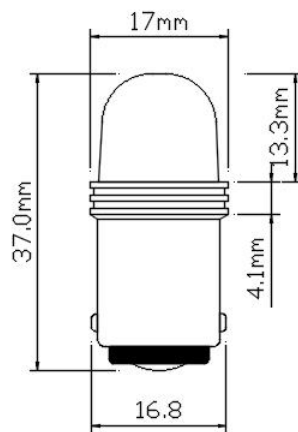

0° View



Top View



Upward View



# CHI MING ELECTRONICS CORP.

|                  |                         |                    |
|------------------|-------------------------|--------------------|
| Specifications   | 1142-17-1UHP-W-10-30VAC |                    |
| Date: 2021.03.16 | Tab: QIU JUN            | Admit: YE XUAN ZHI |