






Model specification	Base type	Emitted Color	Test voltage (V)	Current (mA) ± 10%	Power (W) ± 10%	Luminous flux(LM) ± 25%	Color Temperature (K)	X,Y Coordinate/ Dominant wavelength	Light efficiency (LM/W)
B8.4D-1HP3-W-12VDC	B8.4D	White	15	18	0.27	18	6500	X:0.31~0.32 Y:0.32~0.33	66.7
B8.4D-1HP3-B-12VDC	B8.4D	Blue	15	18	0.27	4	/	λ D:465-470	14.8
B8.4D-1HP3-G-12VDC	B8.4D	Green	15	18	0.27	15	/	λ D:519-525	55.6
B8.4D-1HP3-R-12VDC	B8.4D	Red	15	16	0.24	5	/	λ D:620-625	20.8
B8.4D-1HP3-A-12VDC	B8.4D	Amber	15	18	0.27	14	1600	λ D:590-595	51.9
B8.4D-1HP3-P-12VDC	B8.4D	Pink	15	16	0.24	5	2200	X:0.25~0.26 Y:0.08~0.09	20.8

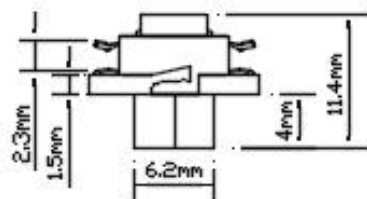

Side View



Top View



Upward View

Description

- 1.Power supply: 12VDC
- 2.LED-SMD5050-0.2W; Amber light using PC-Amber
3. The plastic base is made of PC material.
- 4.Appearance Dimension: L11mm*φ12mm



ROHS
COMPLIANT

CHI MING ELECTRONICS CORP.

Specifications		
B8.4D-1HP3-12VDC		
Date: 2022.12.22	Tab: QIU JUN	Admit: YE XUAN ZHI