





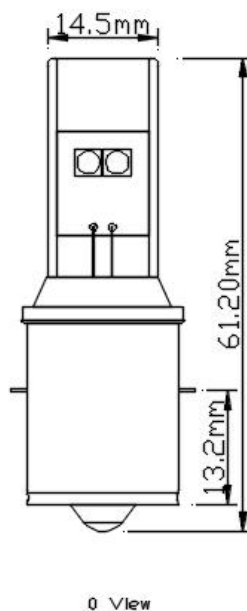

Model specification	Base type	Emitted Color	Test voltage (V)	Current (mA) ± 10%	Power (W) ± 10%	Luminous flux(LM) ± 25%	Color Temperature (K)	X,Y Coordinate/ Dominant wavelength	Light efficiency (LM/W)
BA20S-4UHP-XPE-WW-12/24VDC	BA20S	Warm White	12	300	3.60	430	2900	X:0.44-0.45 Y:0.41-0.42	119.4
			24	150	3.60	440	2900	X:0.44-0.45 Y:0.41-0.42	122.2
BA20S-4UHP-XPE-W-12/24VDC	BA20S	White	12	300	3.60	530	6000	X:0.32-0.33 Y:0.33-0.34	147.2
			24	150	3.60	560	6000	X:0.32-0.33 Y:0.33-0.34	155.6
BA20S-4UHP-3570-LY-12/24VDC	BA20S	Lemon Yellow	12	360	4.32	720	3000	λ_d : 575~577	166.7
			24	200	4.80	750	3000	λ_d : 575~577	156.3

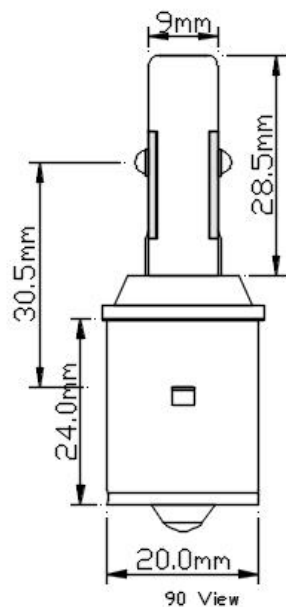

CHI MING ELECTRONICS CORP.

Specifications	BA20S-4UHP-12/24VDC	
Date: 2021.10.16	Tab: QIU JUN	Admit: YE XUAN ZHI