




Model specification	Item No.	Emitted Color	Test voltage (V)	Current (mA) $\pm 10\%$	Power (W) $\pm 10\%$	Luminous flux(LM) $\pm 25\%$	Color temperature (K)	X,Y Coordinate/ Dominant wavelength	Light efficiency (LM/W)
T5WG-TF4.5-W-12VDC	/	White	15	18	0.27	7.0	7000	X:0.30-0.31 Y:0.30-0.31	25.9
T5WG-TF4.5-B-12VDC	/	Blue	15	18	0.27	1.8	/	$\lambda D :465\sim 470$	6.67
T5WG-TF4.5-G-12VDC	/	Green	15	18	0.27	6	/	$\lambda D :520\sim 525$	22.2
T5WG-TF4.5-R-12VDC	/	Red	15	18	0.27	2.8	/	$\lambda D :625\sim 630$	10.4
T5WG-TF4.5-A-12VDC	/	Amber	15	18	0.27	2.5	/	$\lambda D :590\sim 595$	9.26

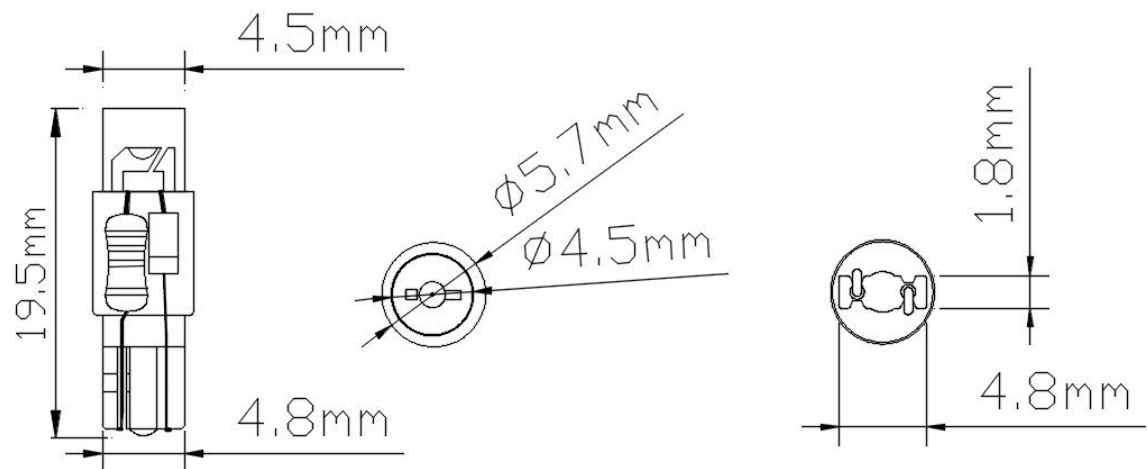

Description

- 1.Power supply: 12VDC OR 24VDC
- 2.Use direct insertion LED flat hair illumination
- 3. indicator for use
- 5.Appearance Dimension:L 19.5mm*T5mm



ROHS
COMPLIANT

CHI MING ELECTRONICS CORP.

Specifications			T5WG-TF4.5-12VDC		
Date: 2020.03.30		Tab: QIU JUN		Admit: YE XUAN ZHI	