


	Model specification	Emitted Color	Test voltage (V)	Current (mA) ± 10%	Power (W) ± 10%	Luminous flux(LM) ± 25%	Color Temperature (K)	X,Y Coordinate/ Dominant wavelength	Light efficiency (LM/W)
	H3/H1-2SMD3570-W-12VDC	White	12	1500	18	2600	6500	X:0.31~0.32 Y:0.32~0.33	144.4



Description

- 1.Power supply: 12V
- 2.SMD3570(8*43MIL)chip high-power 30W
- 3.Flip chip coated with package, the output of lumen is stable.
- 4.Bottom fan added, efficient heat dissipation efficiency.
- 5.High lumen output up .
- 6.H3/H1 chucks can be shared, easy to install
- 7.Appearance Dimension:L64*Φ 10.5mm

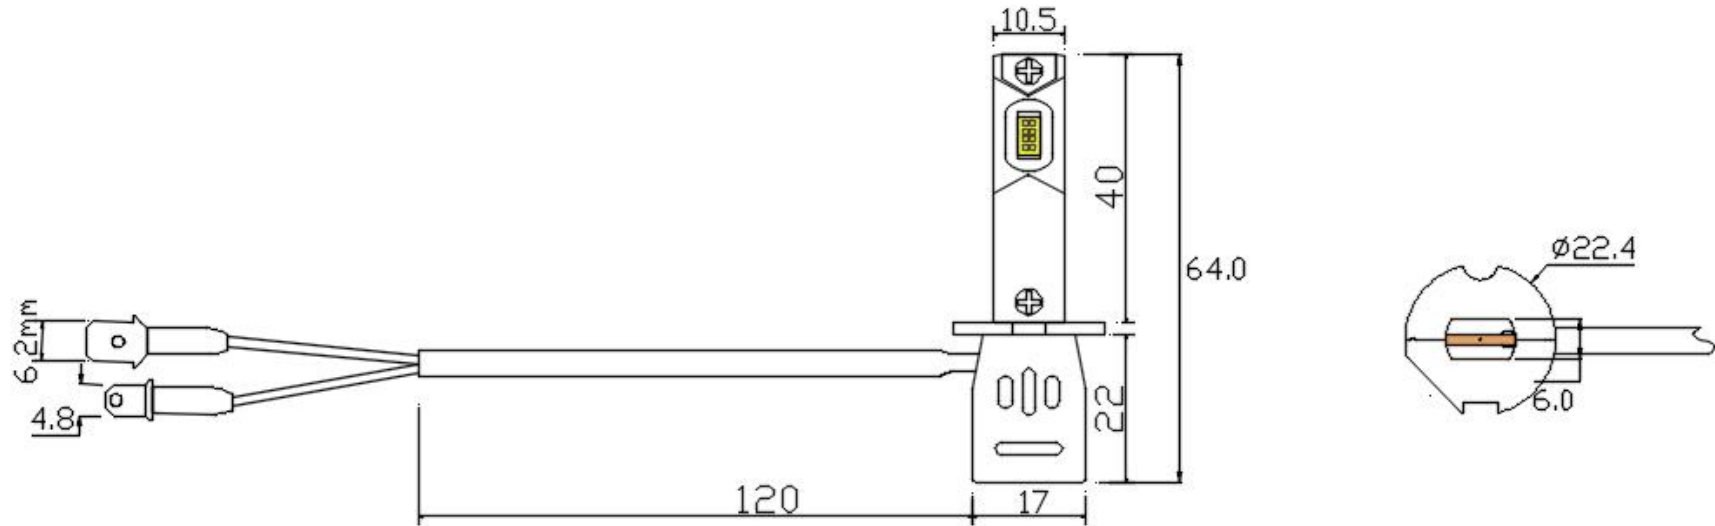

ROHS
COMPLIANT

CHI MING ELECTRONICS CORP.

Specifications		
H3/H1-2SMD3570-12VDC		
Date: 2025.04.09	Tab: QIU JUN	Admit: YE XUAN ZHI